




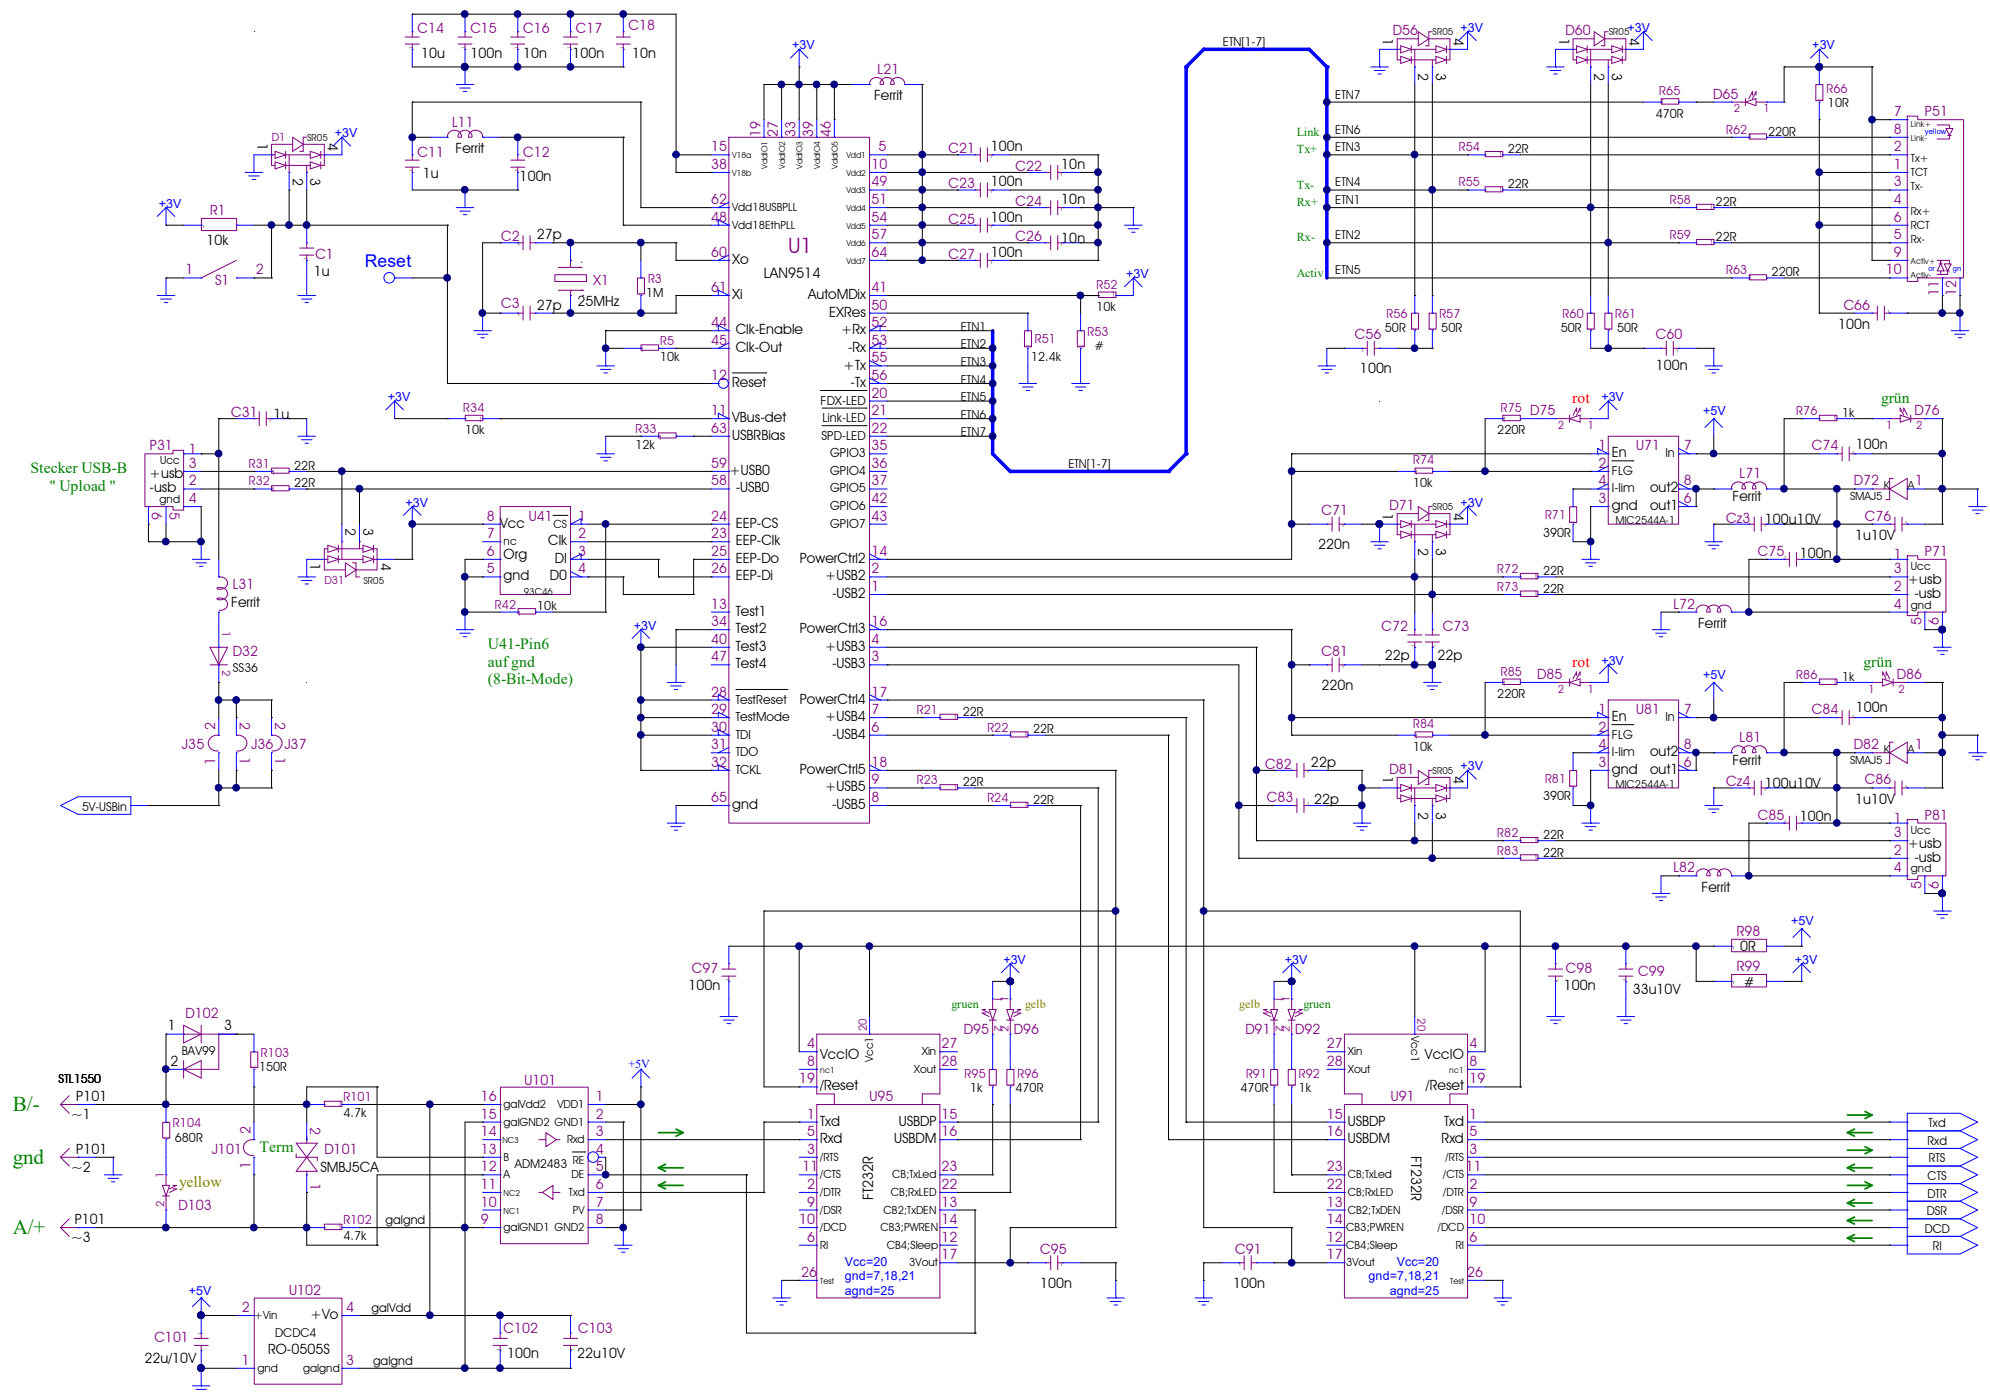

24V
Eingangsspannung
(9V...30V)

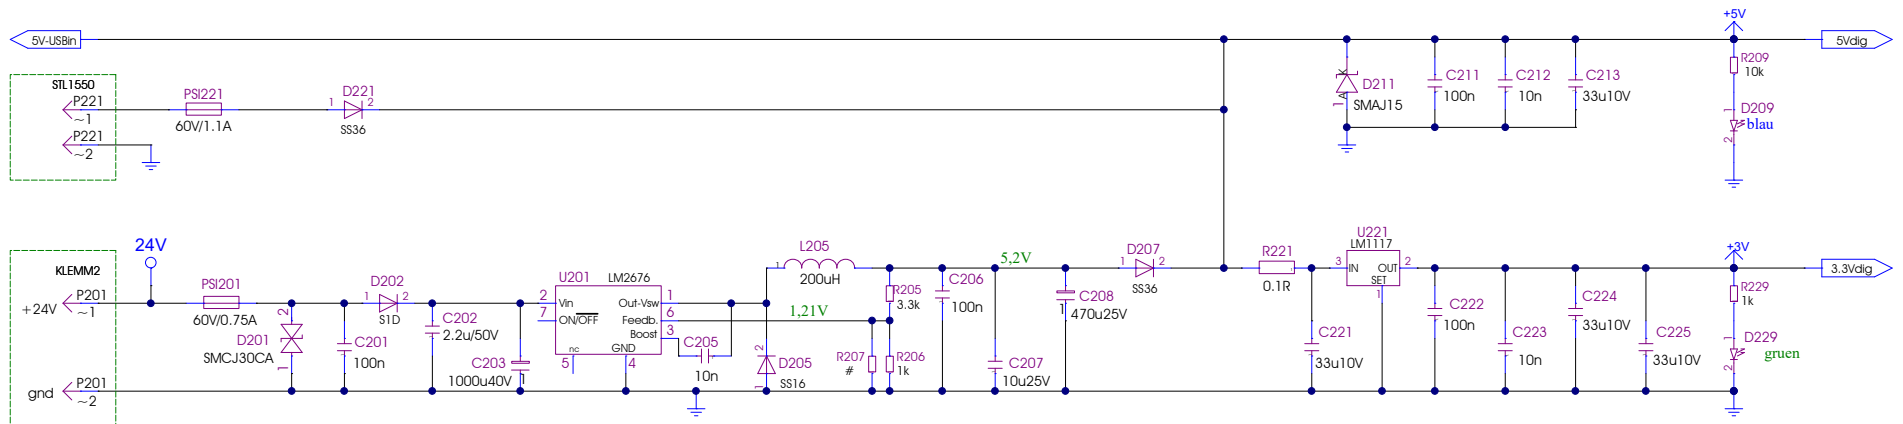

RS232-Female (Buchse)



am Gerät	am PC	Bedeutung
Pin1 DCD	--> DCD	: Data carrier detect
Pin2 Tx	--> Rx	: PC empfängt
Pin3 Rx	--> Tx	: PC sendet
Pin4 DSR	--> DTR	: Data set ready
Pin5 gnd	=	ground
Pin6 DTR	--> DSR	: Data terminal ready
Pin7 CTS	--> RTS	: Ready to send
Pin8 RTS	--> CTS	: Clear to send
Pin9 RI	--> RI	: Ring indicate

